Handling Systematic Errors II

Herman L. Marshall (MIT Kavli Institute)

Summary: IACHEC-1

- Goal: avoid two problems
 - A: claims of new physics due to calibration errors
 - B: features ignored due to presumed systematics
- Triage for handling systematic errors
 - Easy and hard cases are clear
 - line fluxes, energies, ratios should be easy
 - separating source and instrument edges may need PI help
 - Middle ground requires new tools
 - Multiple adjustment functions (HLM) bad
 - Ø Vary instrument models (Drake et al.) good

Summary: IACHEC-1

- Recommendations to Cal scientists
 - Tell users to avoid xspec syserr generally
 - Try a (Drake-type) multi-RF method
 - Publish methods to estimate parameter errors using simulated data
 - Maintain user feedback and post as needed
- Recommendations to missions
 - Develop caveats or "watch out" pages
 - Provide standard reductions
 - Provide background models
 - Provide examples of handling systematic errors

Adjustment Method

Method proposed: Use penalty function

Minimize
$$\Lambda = \sum_j A_j^2 + \exp(\frac{(\chi_{\nu j}^2 - 1)^2}{\nu_j})$$

$$\text{where } \chi^2_{n\nu} = \frac{1}{\nu_n} \sum_{i=1}^{I_n} \frac{[y_{in} - f(x_{in}; \vec{\alpha})(1 + \sum_j A_{nj}g(x_{in}; \vec{\beta_j}))]^2}{s_{in}^2}$$


Problems:


- \circ min χ^2/ν achieved jointly: 2.62, 1.48
- Model is "ugly"


Solutions?


- Different basis functions
- Evolve toward Drake et al. method

- Gaussian normalizations computed
- Not consistent between LETGS observations

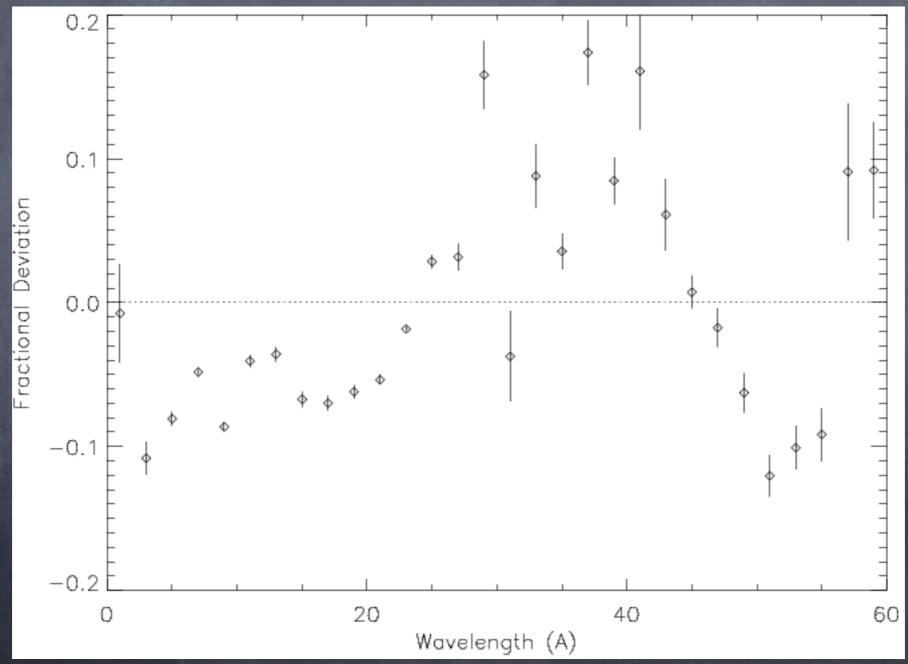

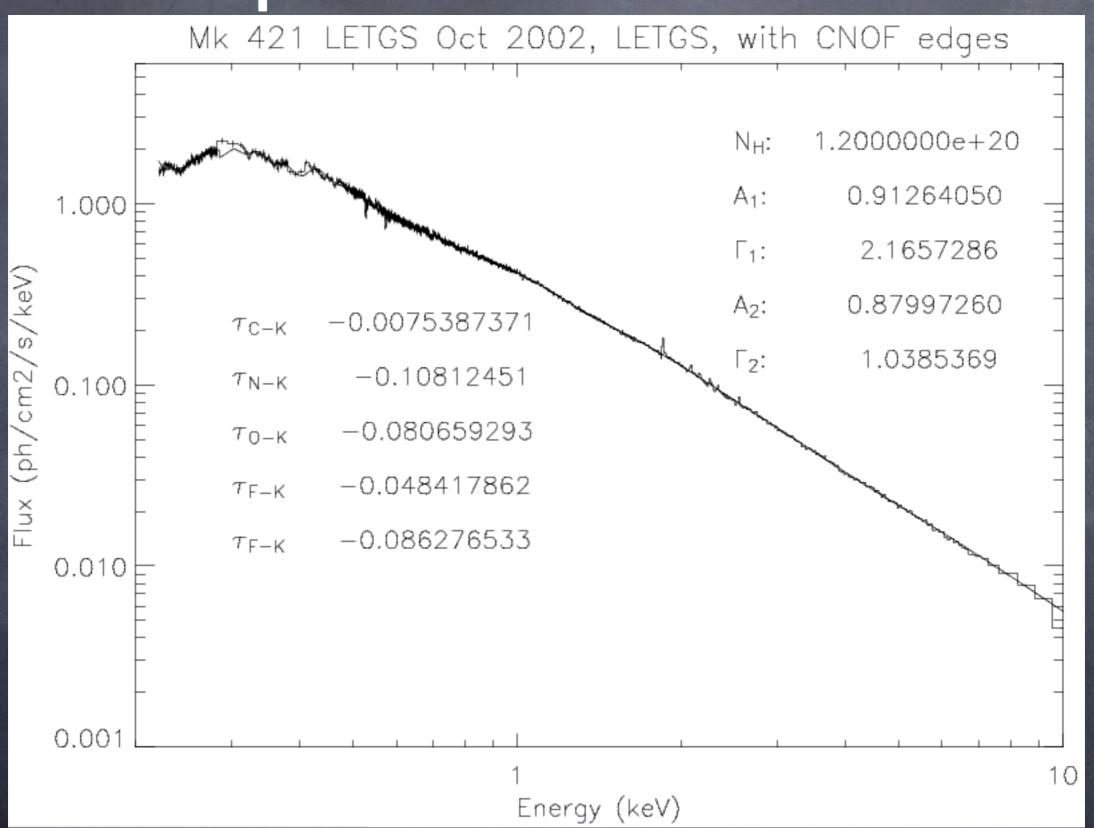


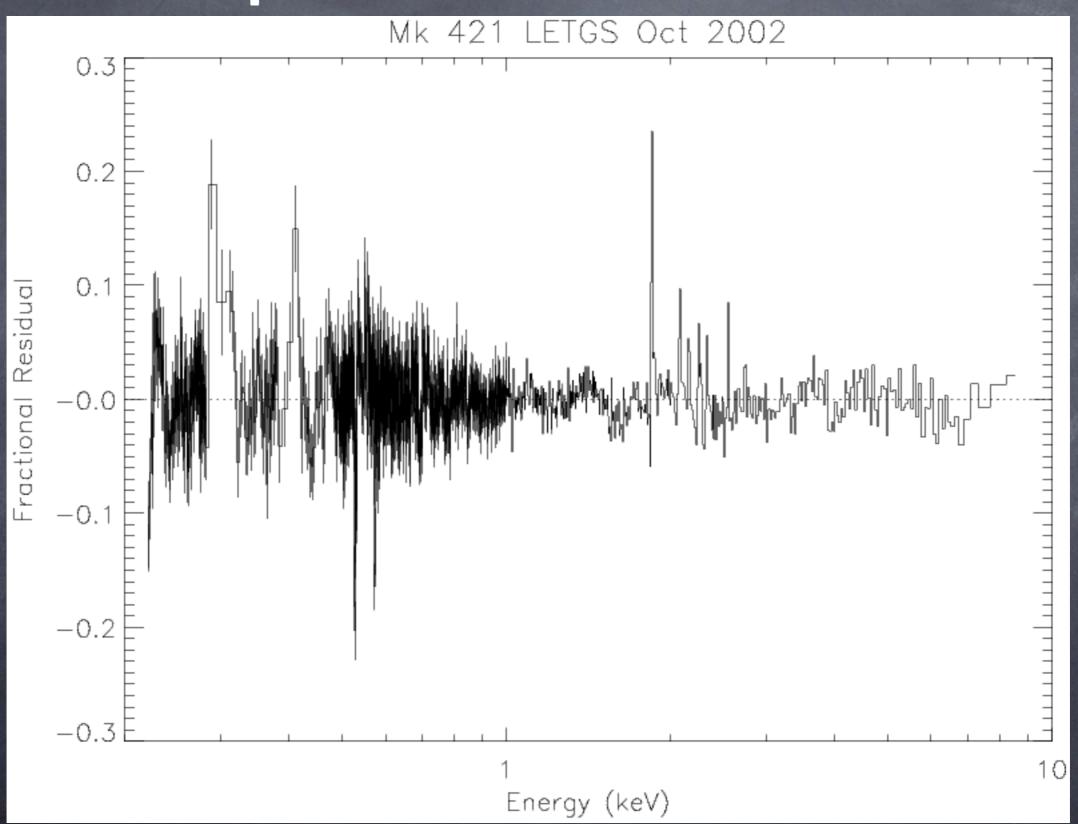

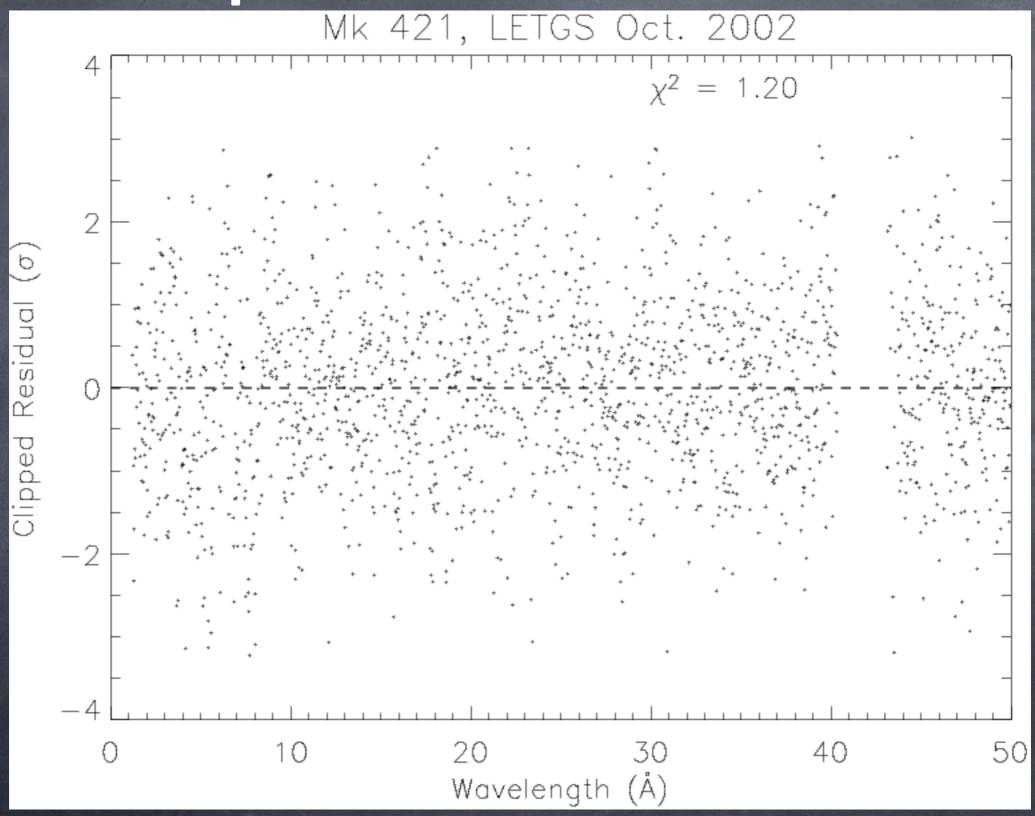

Multiple Fit Methods

- Monte Carlo method (Drake et al. 2006)
 - Systematic errors assigned to each component of the effective area (mirror, detector, filter, ...)
 - EAs are perturbed within bounds in piecewise continuous fashion, weighted by truncated Gaussian
 - RMFs also adjustable via a separate model
 - Run model fits with many EAs
- Library method (Drake et al., in prep.)
 - Use PCA to make EA perturbation basis vectors
 - Proceed as in MC method

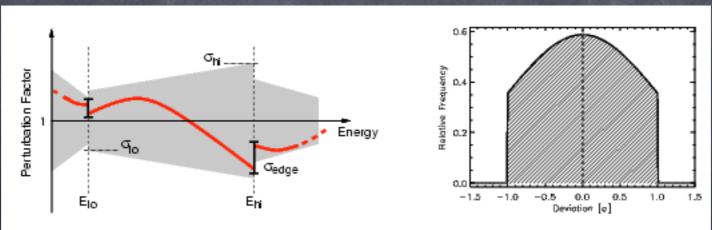

Uses of MC/PCA Method


- Calibration work is setting bounds
 - Adjust bounds until $\chi^2/\nu = 1$ for bright sources
 - Still requires expert knowledge of source
- Observation planning
 - Observer guide gives bounds on systematic errors
 - Users may try out different systematic errors before proposing
- Analysis would be "correct"
 - Can detect model errors if $\chi^2/\nu > 1$
 - Parameter error estimates are valid


Systematic Error Spec

- Several entries for each system component
- 5 values for each energy range


	D D1	77 [1 37]	77 [1 37]			
Component	E_{lo} Edge	$E_{lo} [{\rm keV}]$	$E_{hi} [\mathrm{keV}]$	σ_{lo}	σ_{hi}	σ_{edge}
HRMA Effective Area		0.05	2.156	0.07	0.06	0.02
	Ir $M_4 \ 3d_{3/2}$	2.156	3.183	0.05	0.05	0.01
	Ir M_1 3s	3.183	6.400	0.05	0.05	0.005
		6.400	12.0	0.05	0.20	
OBF Contamination		0.05	0.284	0.50	0.08	0.04
	C K 1s	0.284	0.410	0.08	0.05	0.03
	N K $1s$	0.410	0.543	0.05	0.03	0.01
	O K 1s	0.543	0.697	0.03	0.03	0.01
	F K $1s$	0.697	12.0	0.01	0.005	
OBF Transmittance		0.05	0.284	0.15	0.07	0.03
	$\mathrm{C} \ \mathrm{K} \ 1s$	0.284	0.543	0.05	0.04	0.02
	O K 1s	0.543	1.560	0.03	0.03	0.02
	Al K $1s$	1.560	12.0	0.03	0.01	
ACIS-S3 QE		0.05	0.543	0.10	0.05	0.03
	O K 1s	0.543	1.839	0.03	0.03	0.03
	$\mathrm{Si} \ \mathrm{K} \ 1s$	1.839	12.0	0.03	0.03	

Multiple Fit Results

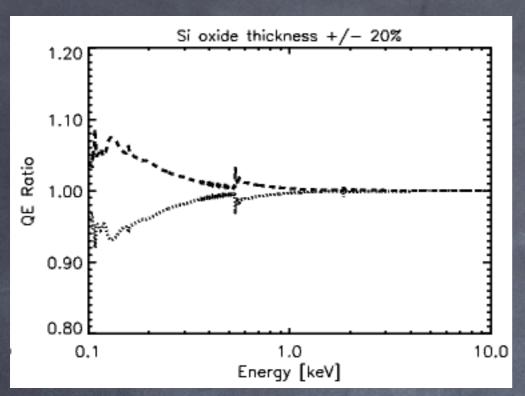


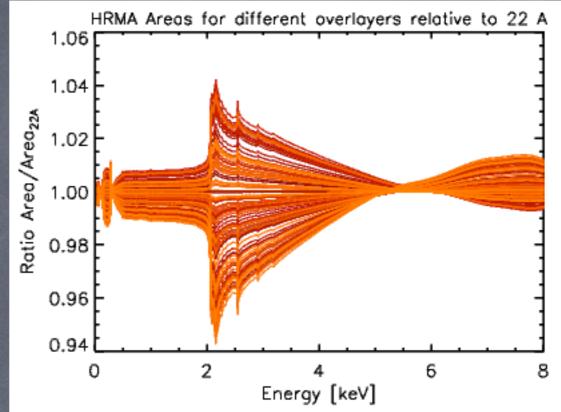

Drake et al. 2006

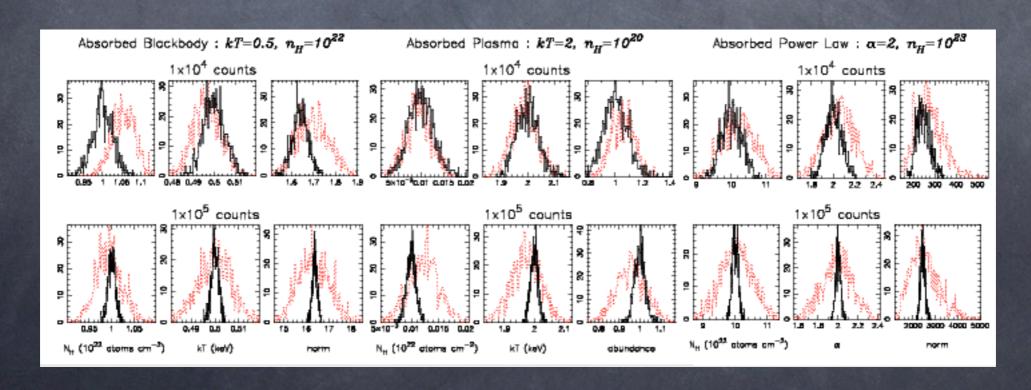

PCA of Effective Areas

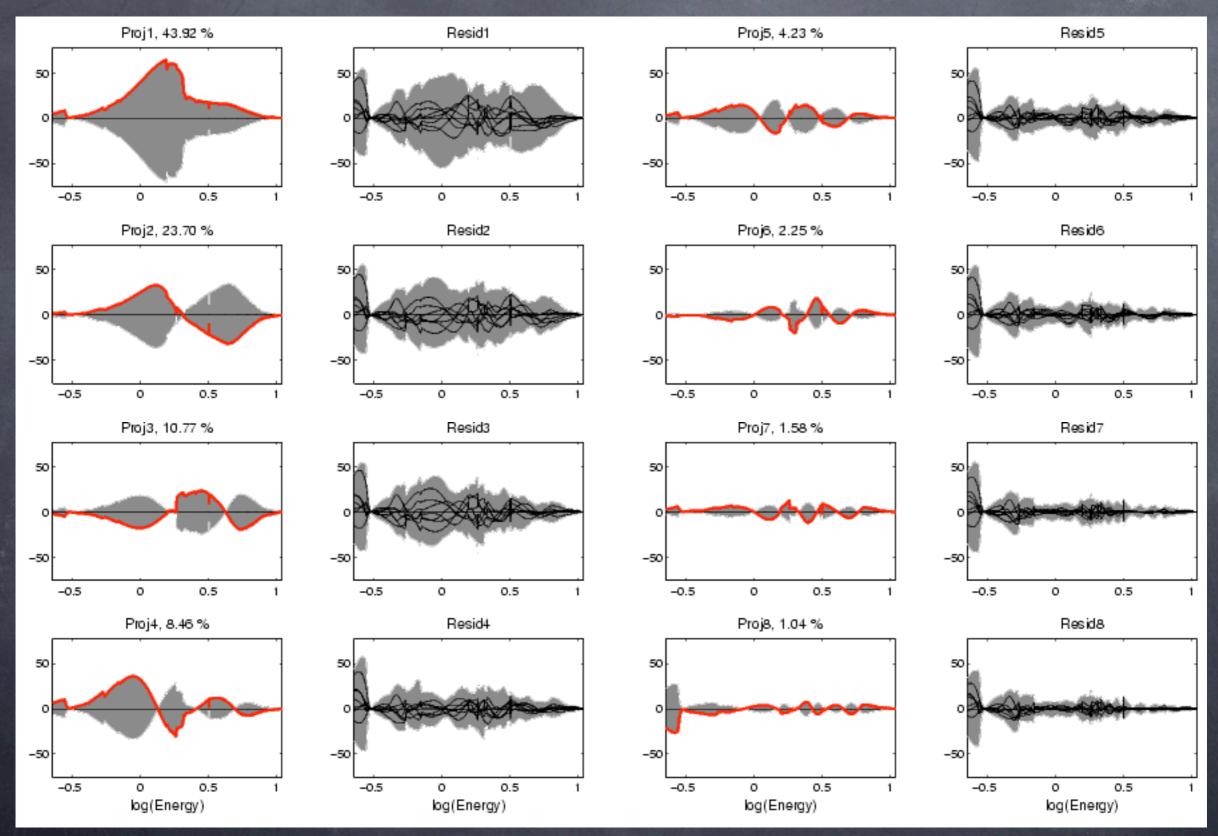

Multiple Fit Issues

- Currently implemented in perl scripts
 - Library of RMFs created with calcrmf2
 - Could use MC-based ACIS model to make RMFs
 - Discussions started to implement in ISIS
- Background model should be included
- Each component adjustment should be physically based
- Users don't know which EA or RMF was "right"
 - Feedback to cal scientists may be unhelpful
 - Still need to fit data without systematic errors